
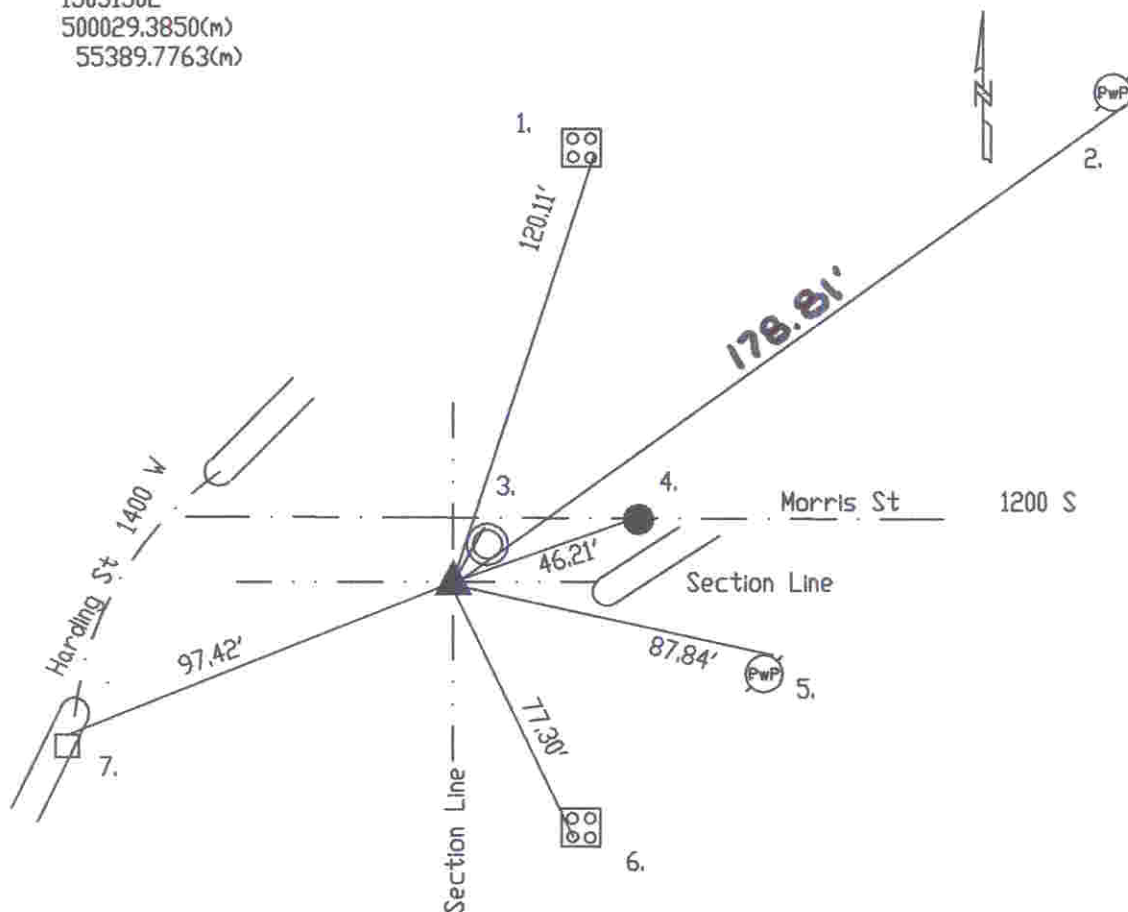


OFFICE OF THE MARION COUNTY SURVEYOR
 SECTION RECORD CORNER
 SECTION 15 TOWNSHIP 15 RANGE 3
 DATE: -7-11-99--- 9-8-05
 PARTY CHIEF: Wilcoxen
 CREW: _____
 TYPE OF MARKER: Harrison
 METHOD OF ESTABLISHMENT: County 9-13-95

IN. S.P.C. E ZONE, NAD 83
 NAME: 15031502
 N: 500029.3850(m)
 E: 55389.7763(m)

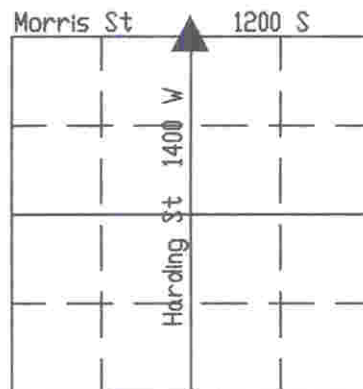

Original post set 1820 by Wm. Laughlin with witnesses: 4" ash N 43 E 23 links, 4" pawpaw S 43 E 16 links per Marion County Atlas pg. 6. Hosbrook 10- 29&30- 1855 called stone but no witnesses per Center Township Legal Survey Book pg. 29. Wilcoxen 3-3-86 called a capped rebar set. Excavated by Wilcoxen 9-13-95 and Harrison set per new construction. Re-tied 7-11-99 by Wilcoxen.

HC531502

REF.	DISTANCE	DESCRIPTION
1.	120.11'	Cut 'x' SE-bolt aluminum light pole base
2.	178.81'	PK nail SE PwP#459-563A 8'up
3.	5.50'	Cut 'x' N-rim manhole
4.	46.21'	Distance to C/L of Morris Street
5.	87.84'	PK nail NE PwP#36-563B 12'up
6.	77.30'	Cut 'x' SW-bolt aluminum signal post base
7.	97.42'	Cut 'x' top N-end of grade inlet